

Qty.	Description
1	CRN 3-10 A-FGJ-A-E-HQQE  Note! Product picture may differ from actual product Product No.: 96516834 Vertical, non-self-priming, multistage, in-line, centrifugal pump for installation in pipe systems and mounting on a foundation. The pump has the following characteristics: - Impellers, intermediate chambers and outer sleeve are made of Stainless steel, EN 1.4401. - Pump head cover and base are made of Stainless steel, EN 1.4408. - The shaft seal has assembly length according to EN 12756. - Power transmission is via cast iron split coupling. - Pipework connection is via DIN / ANSI / JIS flanges/couplings. The motor is a 3-phase AC motor. Controls: Terminal box position: 6 Frequency converter: None Liquid: Pumped liquid: Water Liquid temperature range: -20 .. 120 °C Selected liquid temperature: 20 °C Density: 998.2 kg/m³ Technical: Pump speed on which pump data are based: 2864 rpm Rated flow: 3 m³/h Rated head: 46.4 m Pump orientation: Vertical Shaft seal arrangement: Single Primary shaft seal: HQQE Code for shaft seal: HQQE Approvals: CE,EAC,UKCA,SEPRO,RCM, Approvals for drinking water: WRAS,ACS

Qty.	Description
1	Curve tolerance: ISO9906:2012 3B Materials: Type key, code for rubber components. E = EPDM, V=FKM: E Base: Stainless steel EN 1.4408 AISI 316 Impeller: Stainless steel EN 1.4401 AISI 316 Type key, code for materials: A Bearing: SIC Installation: Maximum ambient temperature: 60 °C Maximum operating pressure: 25 bar Max pressure at stated temp: 25 bar / 120 °C 25 bar / -20 °C Type of connection: DIN / ANSI / JIS Size of inlet connection: DN 25/32 1 1/4 inch Size of outlet connection: DN 25/32 1 1/4 inch Pressure rating for connection: PN 25 Flange rating inlet: 300 lb Flange size for motor: FT100 Terminal box position: 6 Electrical data: Motor standard: IEC Motor type: 80A Rated power - P2: 0.75 kW Power (P2) required by pump: 0.75 kW Mains frequency: 50 Hz Rated voltage: 3 x 220-240D/380-415Y V Rated current: 3.30/1.90 A Starting current: 580-620 % Cos phi - power factor: 0.81-0.71 Rated speed: 2840-2870 rpm IE Efficiency class: IE3 Motor efficiency at full load: 80.7 % Motor efficiency at 3/4 load: 82.7-80.9 % Motor efficiency at 1/2 load: 81.7-77.9 % Number of poles: 2 Enclosure class (IEC 34-5): IP55 Dust/Jetting Insulation class (IEC 85): F Built-in motor protection: NONE



Company name:

Created by:

Phone:

Date:

9/10/2026

Qty.	Description
------	-------------

1	Motor No: 85U05104
---	--------------------

Others:

Minimum efficiency index, MEI $\geq$: 0.70


Net weight: 26.6 kg

Gross weight: 29.4 kg


Shipping volume: 0.074 m³

Finnish LVI No.: 4925590


96516834 CRN 3-10 A-FGJ-A-E-HQQE 50 Hz

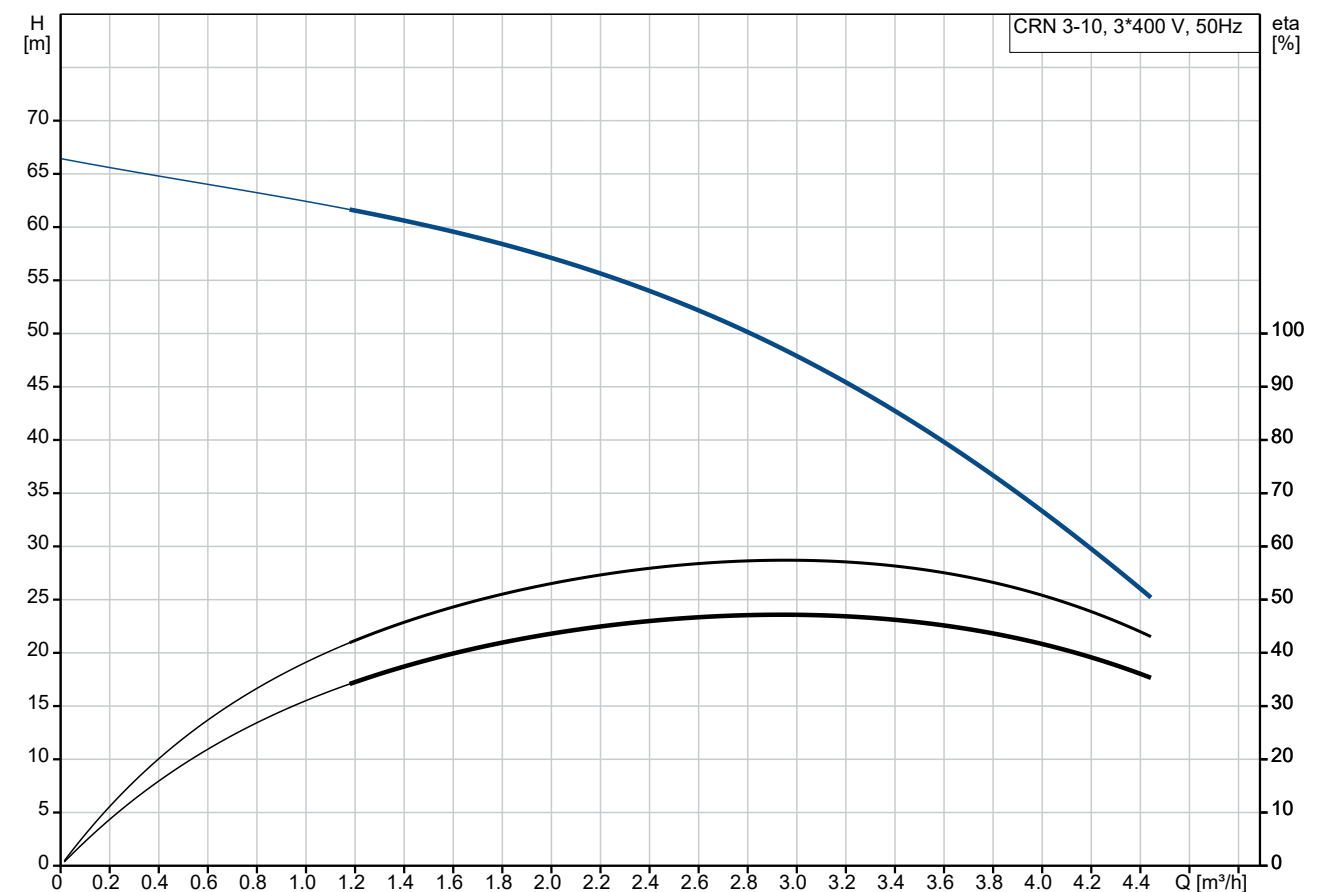




Pumped liquid = Water
 Liquid temperature during operation = 20 °C
 Density = 998.2 kg/m³

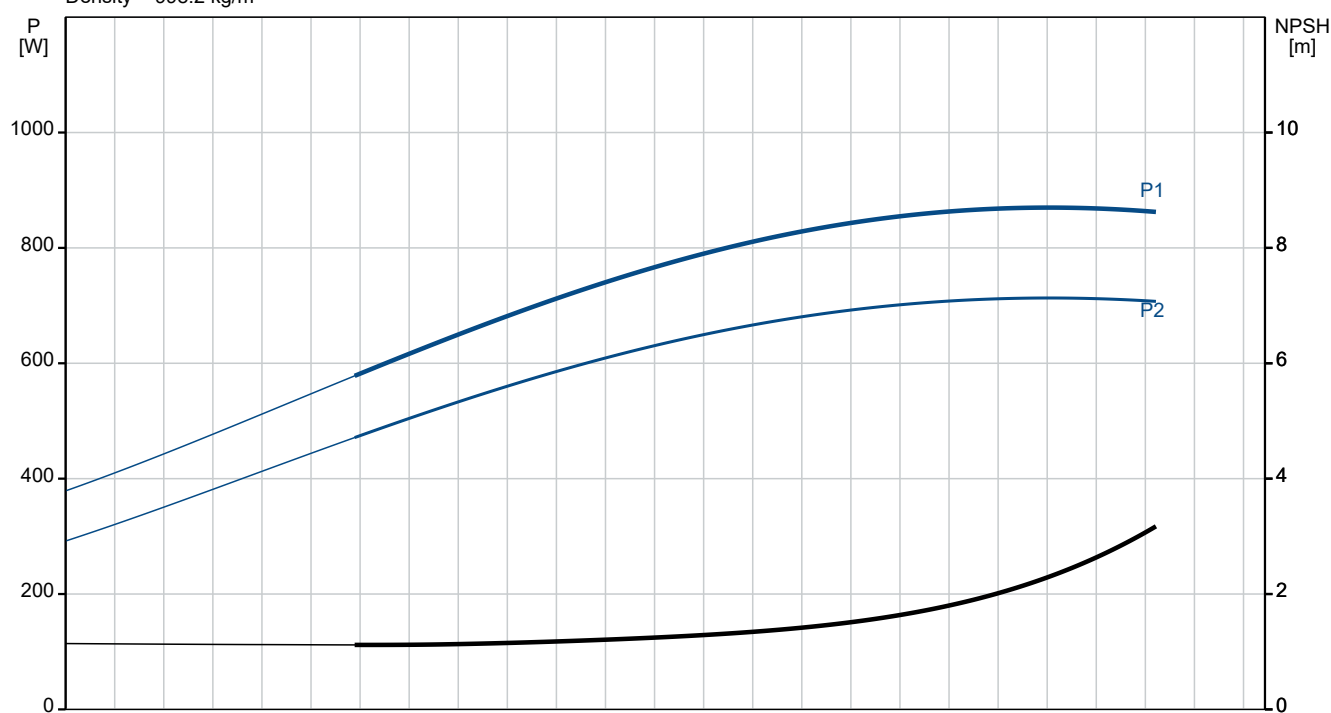

Description	Value
General information:	
Product name:	CRN 3-10 A-FGJ-A-E-HQQE
Product No:	96516834
EAN number:	5700396750651
Price:	
Technical:	
Pump speed on which pump data are based:	2864 rpm
Rated flow:	3 m³/h
Rated head:	46.4 m
Maximum head:	65.6 m
Stages:	10
Impellers:	10
Number of reduced-diameter impellers:	0
Low NPSH:	N
Pump orientation:	Vertical
Shaft seal arrangement:	Single
Primary shaft seal:	HQQE
Code for shaft seal:	HQQE
Approvals:	CE,EAC,UKCA,SEPRO,R CM,
Approvals for drinking water:	WRAS,ACS
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	A
Pump type:	CRN
Materials:	
Type key, code for rubber components. E = EPDM, V=FKM:	E
Base:	Stainless steel EN 1.4408 AISI 316
Impeller:	Stainless steel EN 1.4401 AISI 316
Type key, code for materials:	A
Code for rubber:	E
Bearing:	SIC
Installation:	
Maximum ambient temperature:	60 °C
Maximum operating pressure:	25 bar
Max pressure at stated temp:	25 bar / 120 °C 25 bar / -20 °C
Type key, code for pipework connection:	FGJ
Type of connection:	DIN / ANSI / JIS
Size of inlet connection:	DN 25/32 1 1/4 inch
Size of outlet connection:	DN 25/32 1 1/4 inch
Pressure rating for connection:	PN 25
Flange rating inlet:	300 lb
Flange size for motor:	FT100
Terminal box position:	6
Connect code:	FGJ
Liquid:	
Pumped liquid:	Water

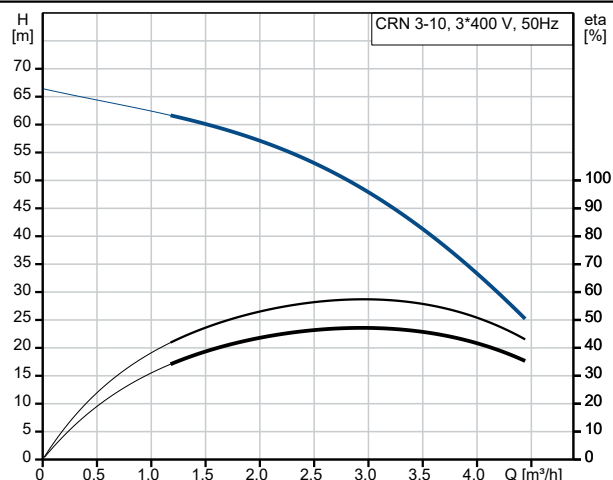

Pumped liquid = Water
Liquid temperature during operation = 20 °C
Density = 998.2 kg/m³

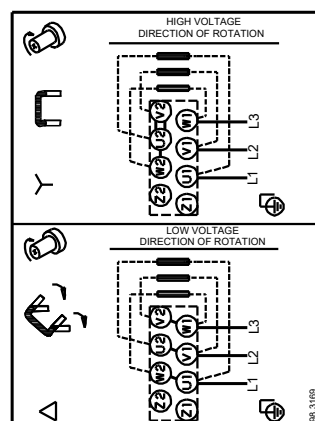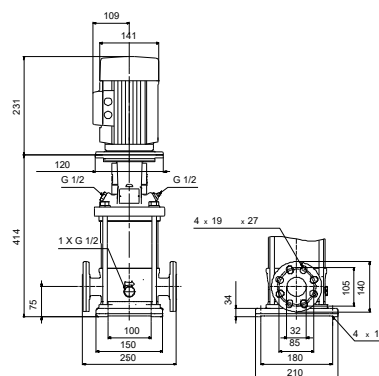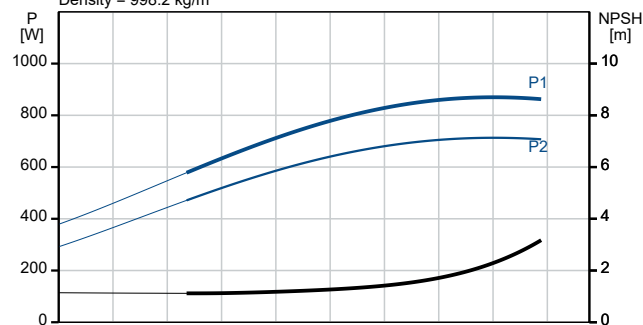



Company name:

Created by:


Phone:

Date:


9/10/2026

Description	Value
Liquid temperature range:	-20 .. 120 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Motor standard:	IEC
Motor type:	80A
Rated power - P2:	0.75 kW
Power (P2) required by pump:	0.75 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 220-240D/380-415Y V
Rated current:	3.30/1.90 A
Starting current:	580-620 %
Cos phi - power factor:	0.81-0.71
Rated speed:	2840-2870 rpm
IE Efficiency class:	IE3
Motor efficiency at full load:	80.7 %
Motor efficiency at 3/4 load:	82.7-80.9 %
Motor efficiency at 1/2 load:	81.7-77.9 %
Number of poles:	2
Enclosure class (IEC 34-5):	IP55 Dust/Jetting
Insulation class (IEC 85):	F
Built-in motor protection:	NONE
Motor No:	85U05104
Controls:	
Terminal box position:	6
Frequency converter:	None
Others:	
Minimum efficiency index, MEI ≥:	0.70
Net weight:	26.6 kg
Gross weight:	29.4 kg
Shipping volume:	0.074 m ³
Finnish LVI No.:	4925590

96516834 CRN 3-10 A-FGJ-A-E-HQQE 50 Hz

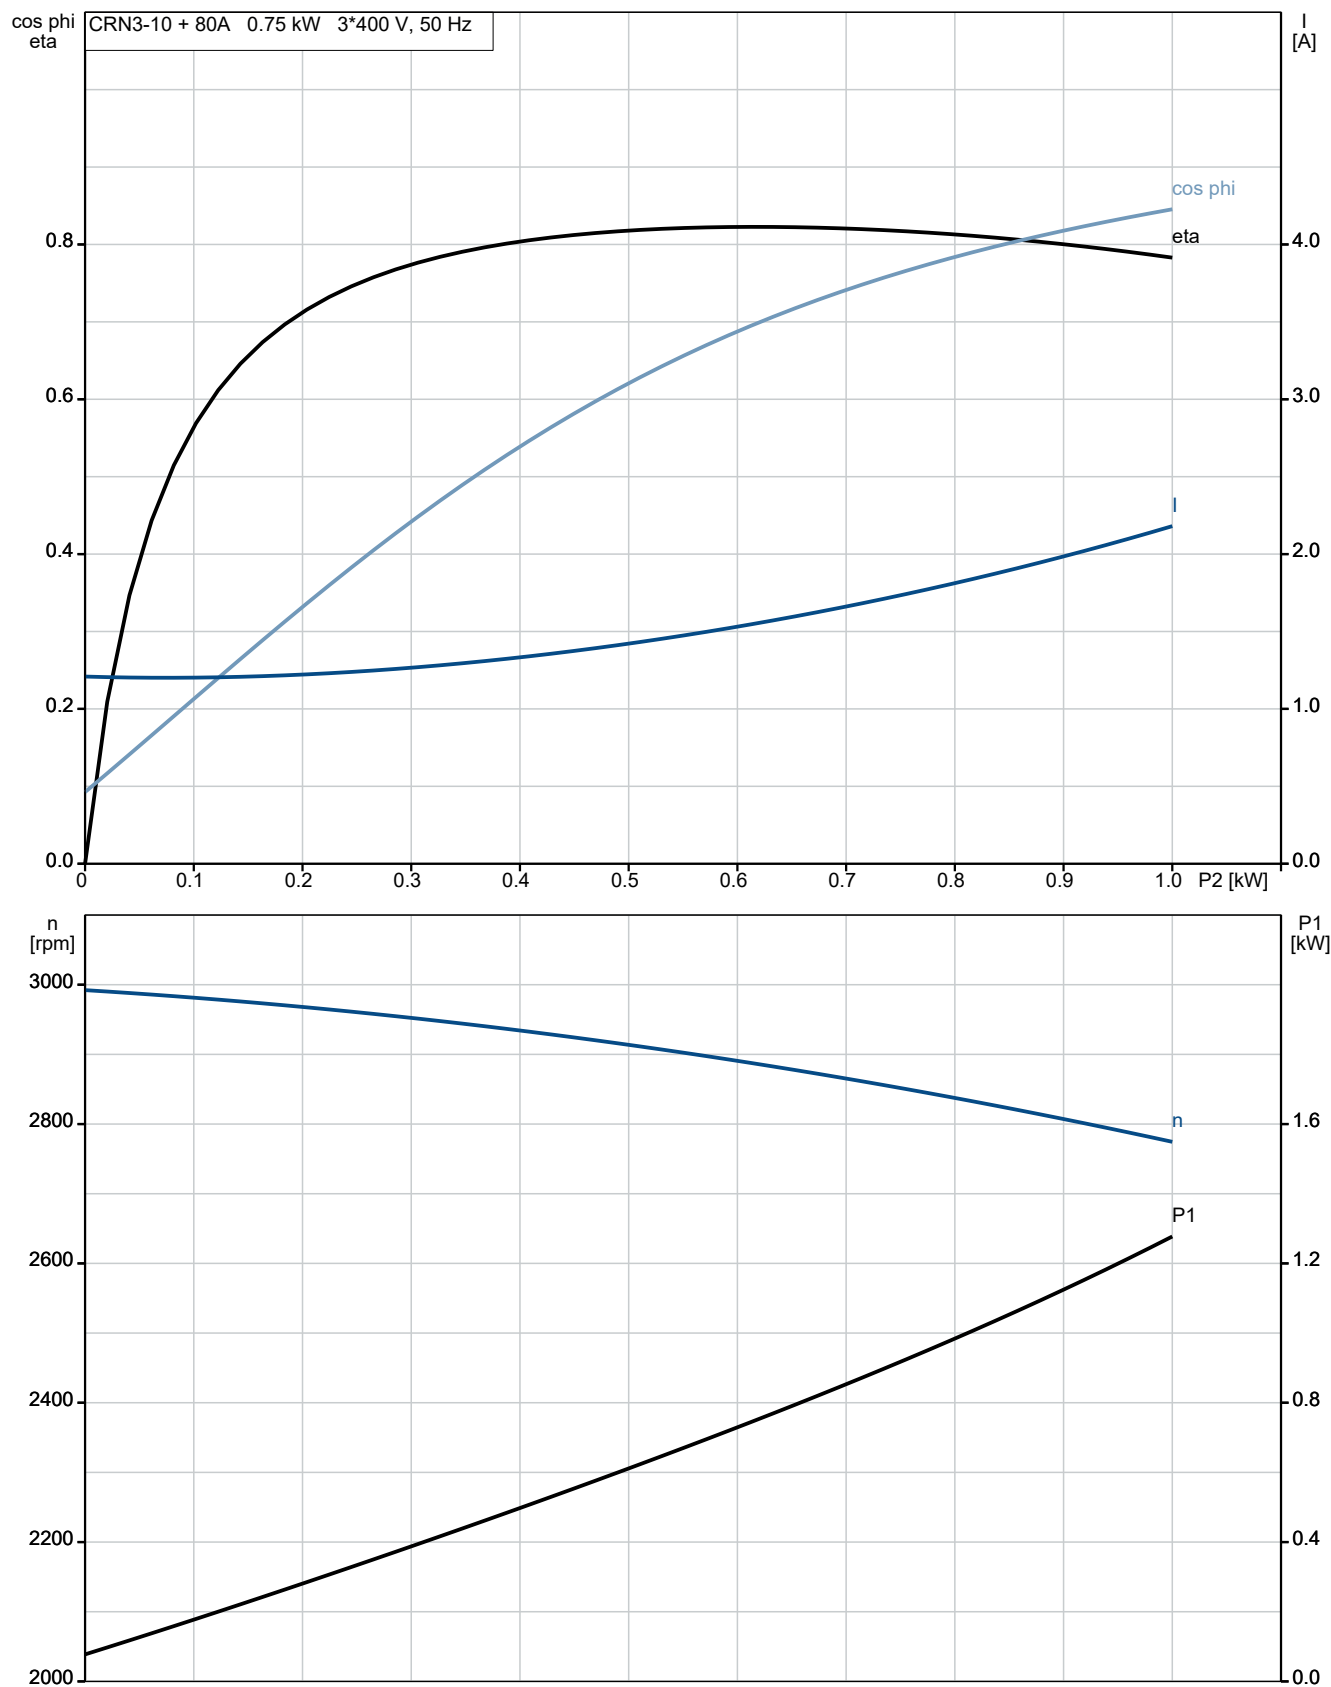


96516834 CRN 3-10 A-FGJ-A-E-HQQE 50 Hz

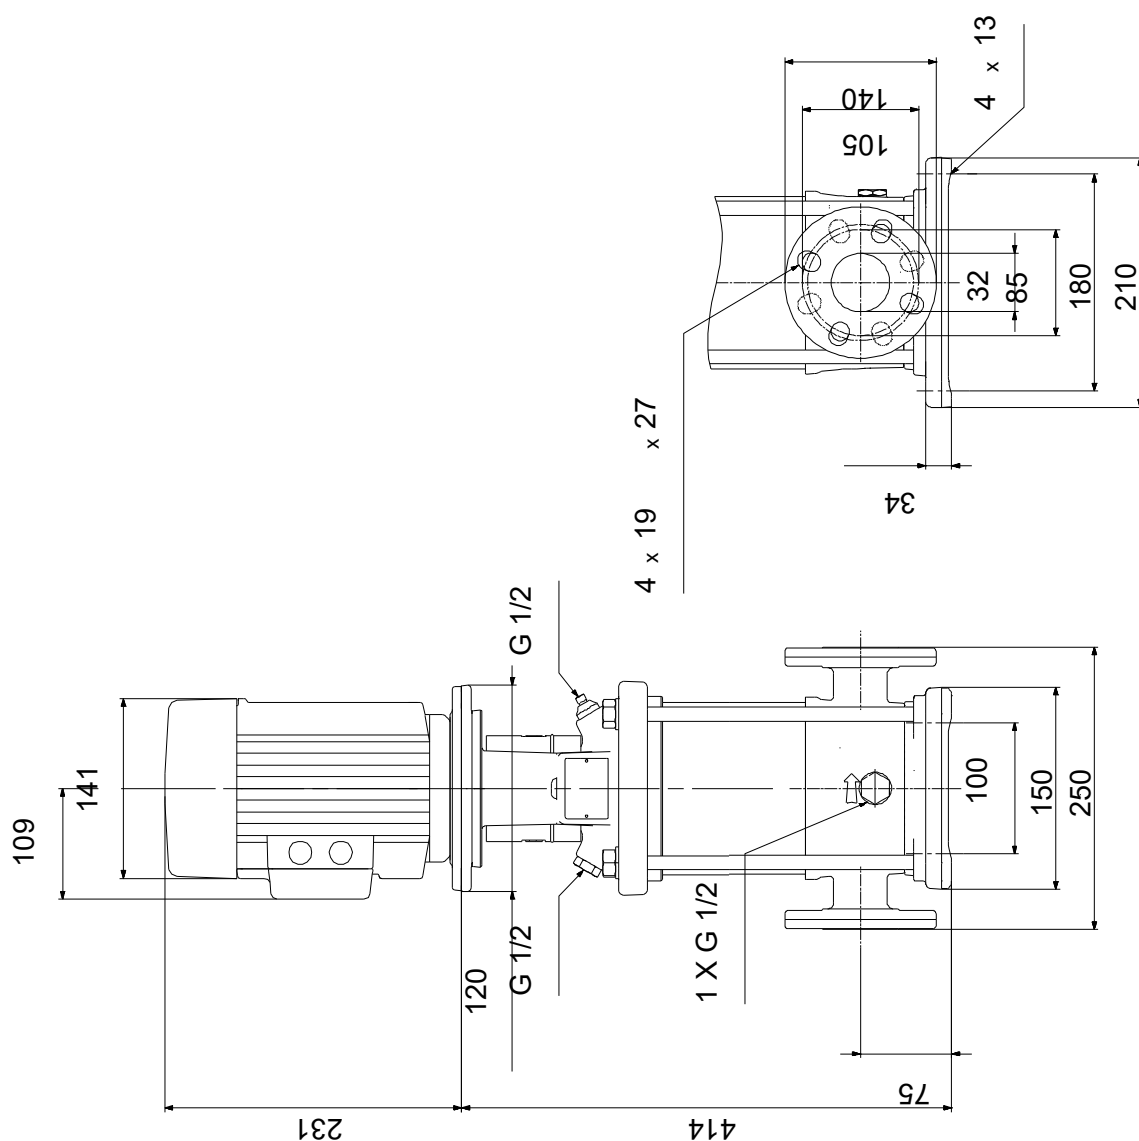

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

96516834 CRN 3-10 A-FGJ-A-E-HQQE 50 Hz

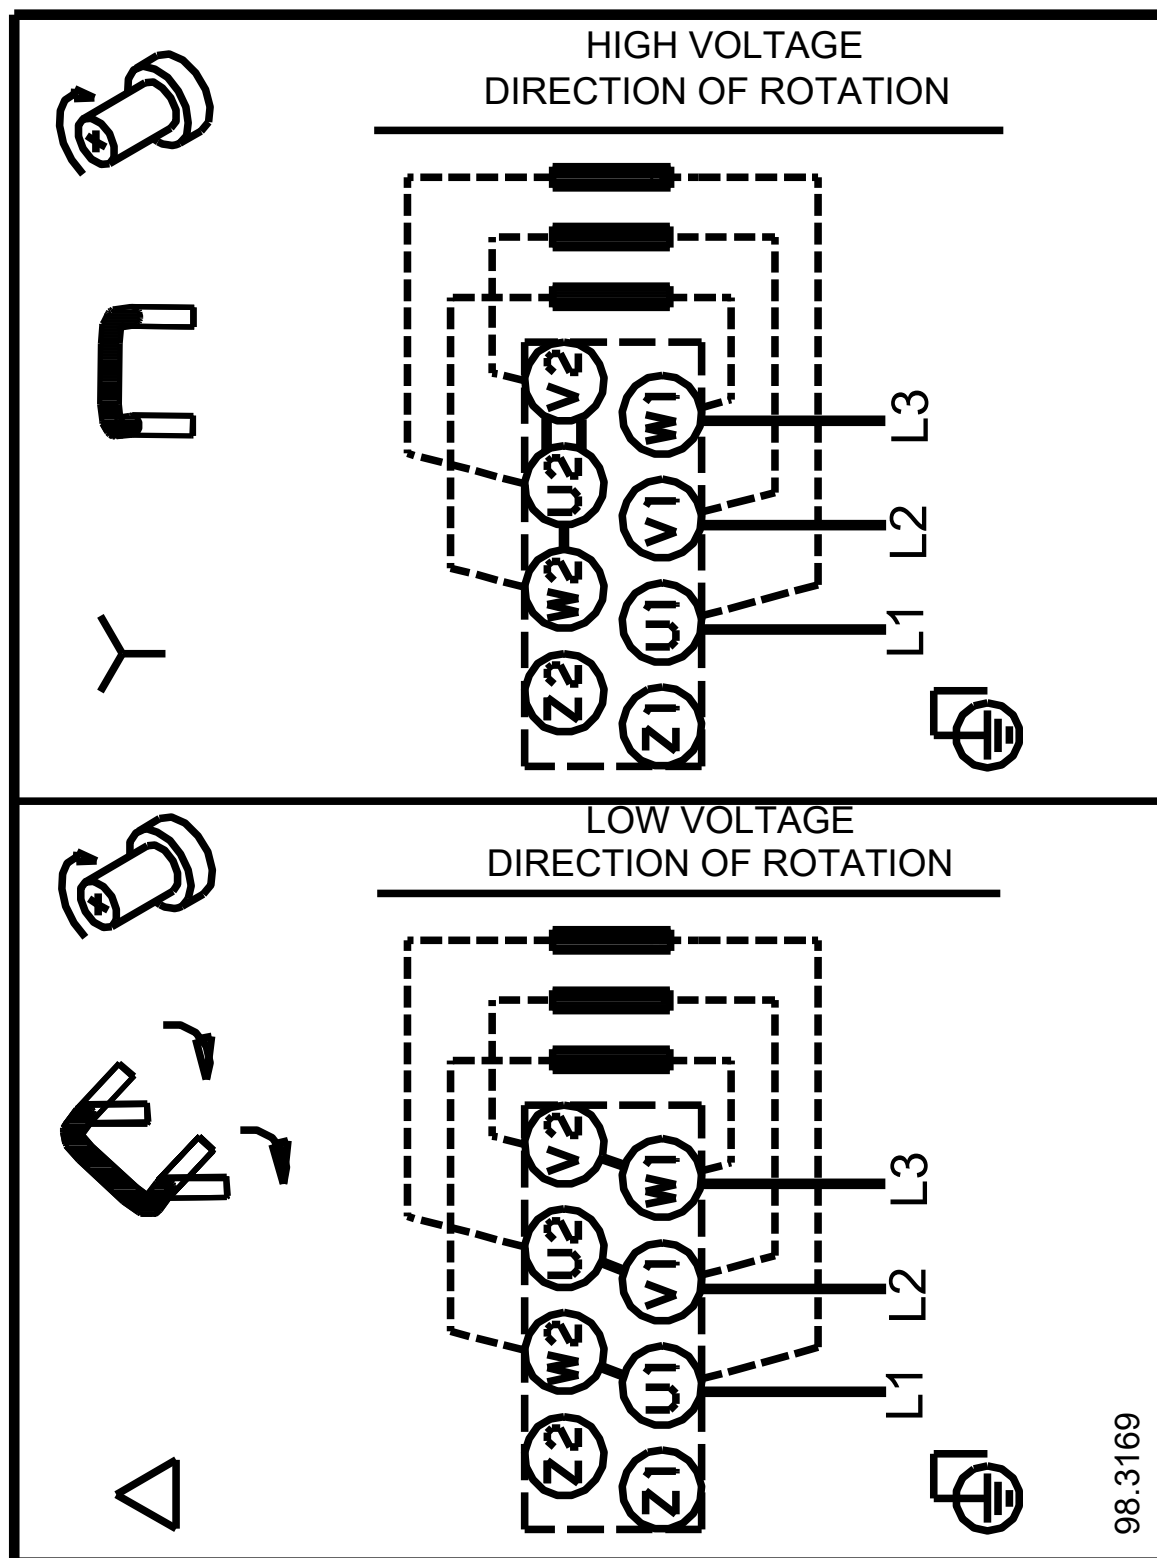

98.3169

Note! All units are in [mm] unless others are stated.