


泳池過濾設備 / POOL FILTRATION EQUIPMENT

砂缸過濾器 Filters

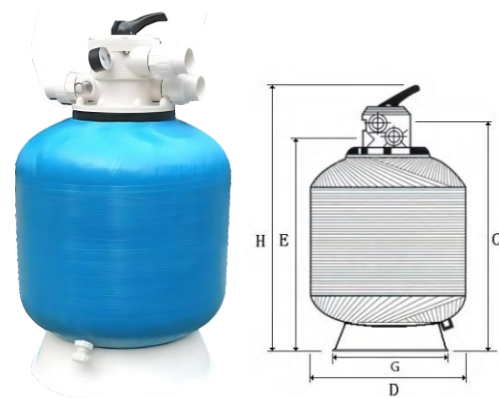

HT-615/HT-715
1.5吋頂出螺絲缸頭
1.5" Top Mount(Bolts)


HT-720
2吋頂出螺絲缸頭
2" Top Mount(Bolts)

HT-725
2.5吋頂出螺絲缸頭
2.5" Top Mount(Bolts)

FB 頂出過濾砂缸

FB Series- Top-Mount Sand Filters

型號 Model	直徑(mm) Diameter	連接管徑(mm) Connection(mm)	流速率(m³/h) Flow(m³/h)	過濾面積(m²) Surface Area(m²)	H mm	A mm	C mm	E mm	缸頭 Six Way Multiport Valve
FB-019	450/18"	48/50	5-7.5	0.159	815	370	640		HT-615
FB-020	500/20"	48/50	6-9.5	0.196	886	460	710		
FB-021	600/24"	48/50	9-13.5	0.283	975	460	800		
FB-022	750/30"	60/63	13-21	0.442	1150	590	934		HT-720
FB-023	900/36"	60/63	19-30	0.636	1300	790	1084		
FB-024	1000/40"	75/76	24-37.5	0.785	1380	945	1164		HT-720 or HT-725
FB-025	1200/48"	75/76	33-54.5	1.131	1580	1010	1364		




HT-915/HT-920
1.5吋/2吋側出螺絲缸頭
1.5"/2" Side Mount

HT-925
2.5吋側出螺絲缸頭
2.5" Side Mount

FB 側出過濾砂缸

FB Series- Side-Mount Sand Filters


型號 Model	直徑(mm) Diameter	連接管徑(mm) Connection(mm)	流速率(m³/h) Flow(m³/h)	過濾面積(m²) Surface Area(m²)	H mm	A mm	C mm	E mm	缸頭 Six Way Multiport Valve
FB-001	500/20"	48/50	6-9	0.196	811	460	551	470	HT-915
FB-002	600/24"	48/50	9-14	0.283	891	460	594	513	
FB-003	750/30"	60/63	13-21	0.442	1006	590	643	562	
FB-004	900/36"	60/63	19-30	0.636	1228	790	779	698	HT-920
FB-005	1000/40"	75/76	24-37	0.785	1233	945	787	707	
FB-006	1200/48"	75/76	33-54	1.131	1433	1010	901	820	HT-920 or HT-925



側出(法蘭)過濾砂缸

FB Series- Side-Mount Sand Filters

型號 Model	直徑(mm) Diameter	接口尺寸(mm) Connection	流量 (m³/h) Flow	過濾面積 (m²) Surface Area	效率 (%) Efficiency	砂重 (kg) Sand Weight	壓力 (kg/cm²) Pressure	H mm	A mm	C mm	E mm	B mm
FB-064	1200	3"	33-54	1.01	95	750	2.5	1400	1010	500	550	340
FB-067	1400	3"	46-73	1.54	95	1600	2.5	1620	1150	500	665	340
FB-200	1600	4"	60-100	2.01	95	2300	2.5	1760	1440	500	685	440
FB-044	1200	3"	33-54	1.01	95	1400	2.5	1800	1020	500	725	440
FB-047	1400	4"	46-73	1.54	95	1900	2.5	1800	1230	500	735	440
FB-173	1600	4"	60-100	2.01	95	2600	2.5	1900	1440	500	780	440
FB-174	1800	6"	76-122	2.55	95	3500	2.5	1940	1570	500	810	440
FB-186	2000	6"	94-150	3.14	95	4500	2.5	2000	1780	500	825	440
FB-190	2300	8"	130-208	4.34	95	6000	2.5	2360	1760	500	1020	600
FB-199	2500	8"	150-235	4.91	95	8300	2.5	2450	1760	500	980	600



HT-815/HT-820
1.5"/2" Top Mount(Clamps)
1.5"/2" Top Mount(Clamps)


FC 頂出(缸箍)過濾砂缸

FC Series- Top-Mount Clamp Sand Filters

型號 Model	直徑(mm) Diameter	連接管徑(mm) Connection(mm)	流速率(m³/h) Flow(m³/h)	過濾面積(m²) Surface Area(m²)	H mm	A mm	C mm	E mm	B mm	缸頭 Six Way Multiport Valve
FC-018	400/16"	48/50	4-6	0.126	723	596	350	494	560	HT-815
FC-019	450/18"	48/50	5-7.5	0.159	814	685	350	571	637	
FC-020	500/20"	48/50	6-9.5	0.096	909	780	460	645	711	
FC-021	600/24"	48/50	8.5-13.5	0.283	979	850	460	729	795	HT-820
FC-022	750/30"	60/63	13.5-21	0.442	1164	1015	580	868	939	
FC-023	900/36"	60/63	19-30	0.636	1289	1140	770	994	1065	

以上圖表為沙缸(石英沙過濾器)的基本尺寸，實際尺寸會因缸身、缸腳及法蘭材質而有所不同。購買前請務必向本公司確認最終尺寸。


These are the basic dimensions of the sand filter. Actual dimensions may vary depending on the tank body, base, and flange material. Please confirm the final specifications with our company before purchase.

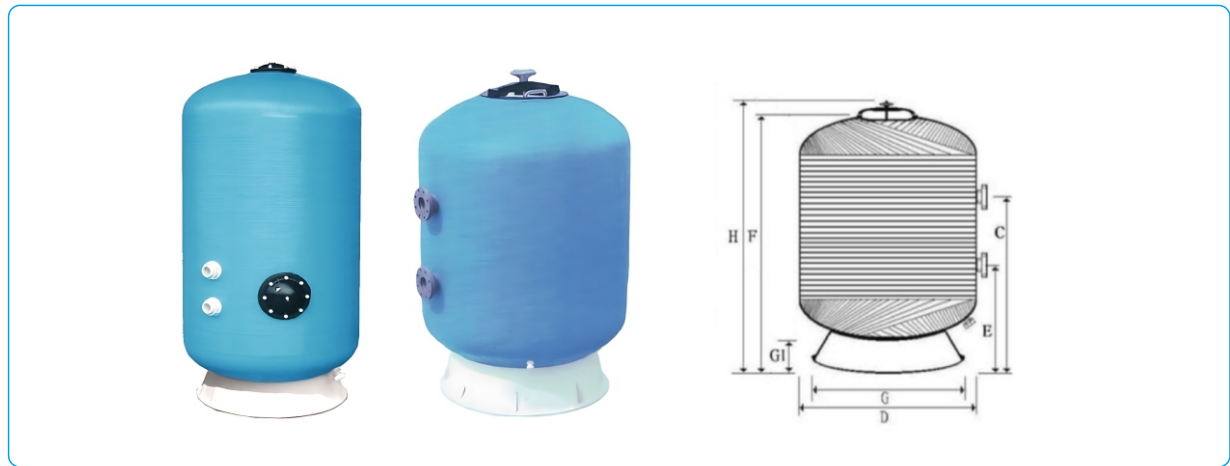

FA/DFB深層過濾砂缸
 FA/DFB Series- Deep filter sand cylinder

型號 Model	直徑(mm) Diameter	連接管徑(mm) Connection	流量 (m³/h) Flow	過濾面積 (m²) Surface Area	效率 (%) Efficiency	砂重 (kg) Sand Weight	壓力 (kg/cm²) Pressure	H mm	C mm	E mm	F mm	G mm	G1 mm
FA-005	1050	80/3"	43	0.86	95	1050	2.5	2070	1390	590	1940	950	240
FA-006	1200	100/4"	56	1.13	95	1500	2.5	2080	1405	605	1950	1000	245
FA-025	1400	125/5"	77	1.54	95	2000	2.5	2175	1490	690	2045	1160	265
FA-007	1600	150/6"	100	2.01	95	2650	2.5	2310	1560	760	2180	1510	310
FA-026	1800	150/6"	125	2.54	95	2350	2.5	2320	1600	800	2190	1580	390
FA-008	2000	150/6"	157	3.14	95	4100	2.5	2420	1640	848	2290	1788	290
FA-009	2300	200/8"	217	4.34	95	5700	2.5	2520	1785	985	2390	1940	335
DFB-003	750	60/63	13	0.442	95	300	2.5	2000	590	643	562		
DFB-004	900	60/63	19	0.636	95	400	2.5	2000	790	779	698		

FH臥式過濾砂缸

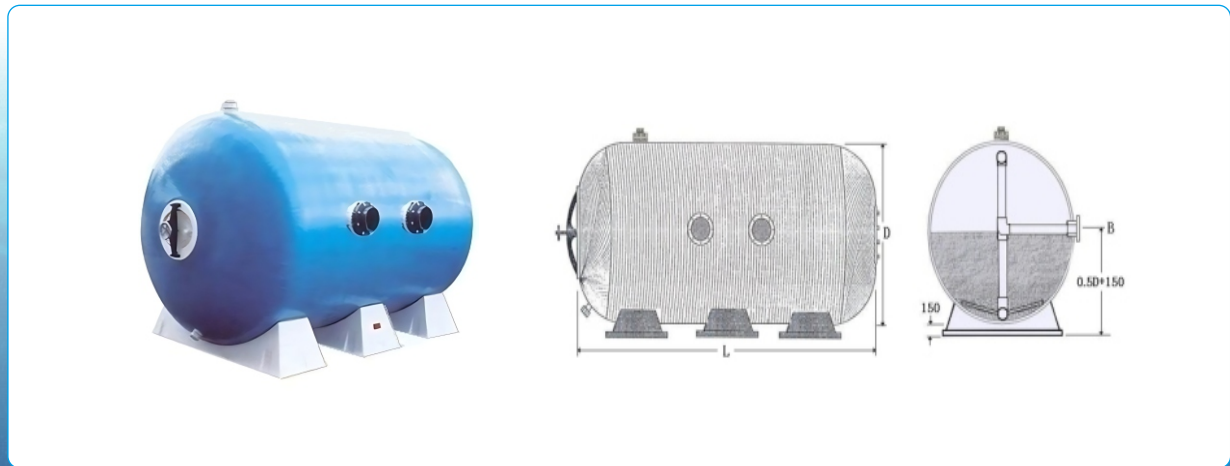

以上圖表為沙缸(石英沙過濾器)的基本尺寸，實際尺寸會因缸身、缸腳及法蘭材質而有所不同。購買前請務必向本公司確認最終尺寸。
 These are the basic dimensions of the sand filter. Actual dimensions may vary depending on the tank body, base, and flange material. Please confirm the final specifications with our company before purchase.

水泵 Pumps

型號 Model	瓦特 Watts	電壓 Volt	馬力 HP	電流(A) Amp	轉速 RPM	入口直徑 (mm) Inlet	出口直徑 (mm) Outlet	揚程@ (m³/時) Discharge HEAD in Metres			長度 (mm) Length	寬度 (mm) Width	高度 (mm) Height
								5M	10M	12M			
KT-75	550	220	3/4	3.1	2800	50	50	13	11.5	3	545	280	295
KT-100	750	220	1	3.25	2800	50	50	14.8	13	6	605	280	295
KT-150	1100	220	1.5	4.8	2800	50	50	19.3	14.8	7.6	605	280	295
KT-200	1500	220	2	6.5	2800	50	50	25.2	20.8	15	605	280	295
KT-300	2200	220/380	3	7.5 / 4.2	2800	50	50	29.4	24.5	18.2	605	280	295


KT Series

型號 Model	瓦特 Watts	電壓 Volt	馬力 HP	電流(A) Amp	轉速 RPM	入口直徑 (mm) Inlet	出口直徑 (mm) Outlet	揚程@ (m³/時) Discharge HEAD in Metres			長度 (mm) Length	寬度 (mm) Width	高度 (mm) Height
								5M	10M	12M			
KH-300	2200	380	3	4.2	2800	75	65	30.2	24.5	18	610	260	355
KH-400	3000	380	4	5.7	2800	75	65	41.7	32.9	20	645	260	355
KH-500	4000	380	5	6.8	2800	75	65	50.1	37.5	25.8	670	260	355


KH Series

產品圖片 Product Images	產品名稱 Content (Name)	規格型號 Specification	尺寸 Size	流量 Pump flow	揚程 Pump Head
	KP 塑膠過濾水泵 KP Plastic Filtering Pump	1.0HP/220V	2"63MM	28	17
		1.5HP/220V	2"63MM	28	17
		2.0HP/220V	2"63MM	32	19
		3.0HP/ 220V/380V	2"63MM	36	21
		3.5HP/220V/380V	2"63MM	40	22
		4.0HP/220V/380V	2"63MM	44	23
	OKEAK變頻塑膠過濾水泵 Variable Frequency Plastic Filtering Pump	2HP/220V	2"63MM	10~30	6~20
		3HP/220V	2"63MM	10~35	6~21
	OKKP塑膠過濾水泵 OKKP Plastic Filtering Pump	1.5HP/220V	2"63MM	18	18
		2HP/220V	2"63MM	25	18
		3HP/220V	2"63MM	30	20
		3HP/380V	2"63MM	30	20
	OKSP塑膠過濾水泵 OKSP Plastic Filtering Pump	1HP/220V	2"63MM	18	17
		1.5HP/220V	2"63MM	18	18
		2HP/220V	2"63MM	25	18
		3HP/220V	2"63MM	30	20
		3HP/380V	2"63MM	30	20
	HP 銅鋅合金過濾泵 HP Copper-Zinc Alloys Filtering Pump	3.0HP/380V	2"63MM	30	18
		4.0HP/380V	2"63MM	40	18
		5.0HP/380V	Inlet:3"90MM Outlet:2.5"75MM	60	18
		7.5HP/380V	Inlet:3"90MM Outlet:2.5"75MM	70	19
	HP 銅鋅合金過濾泵 HP Copper-Zinc Alloys Filtering Pump	10HP/380V	Inlet:4"110MM Outlet:3"90MM	100	25
		15HP/380V	Inlet:4"110MM Outlet:3"90MM	140	33
	HB金屬過濾泵 HB Metal Filter Pump	3.0HP/380V	2"63MM	30	18
		4.0HP/380V	2"63MM	40	18
		5.0HP/380V	Inlet:3"90MM Outlet:2.5"75MM	60	18
		7.5HP/380V	Inlet:3"90MM Outlet:2.5"75MM	70	19
		10HP/380V	Inlet:4"110MM Outlet:3"90MM	100	25
		15HP/380V	Inlet:4"110MM Outlet :3"90MM	140	33

紙芯過濾器 Cartridge Filter

型號 Model	過濾面積 (m²) Surface Area (m²)	設計流量(公升/分鐘) Design Flow Rate	流通量(升/8小时) Turnover L/8 HR	流通量(升/10小时) Turnover L/10 HR	寬外形尺mm Width (mm)	高外形尺mm Height (mm)	紙芯型號 Element Model
CF-25	25	95	45420	56775	230	500	CFE-025
CF-50	50	189	90840	113550	230	750	CFE-050
CF-75	75	284	136260	170325	230	750	CFE-075
CF-100	100	341	163512	204390	230	1280	CFE-100
CF-125	125	454	272520	272520	230	1280	CFE-125



紙芯型號 Element Model	產品名稱 Content (Name)	配置 Matched
CFE-025	紙芯 (120頁) Paper Core (120 Pages)	1個/台 1 Piece/Unit
CFE-050	紙芯 (120頁) Paper Core (120 Pages)	1個/台 1 Piece/Unit
CFE-075	紙芯 (160頁) Paper Core (160 Pages)	1個/台 1 Piece/Unit
CFE-100	紙芯 (120頁) Paper Core (120 Pages)	2個/台 2 Piece/Unit
CFE-125	紙芯 (140頁) Paper Core (140 Pages)	2個/台 2 Piece/Unit

一體化過濾設備 All-In-One Filter System



型號 Model	產品名稱 Content (Name)	配置 Matched	配套水泵 Pump
SCF-100P100	紙芯一體化過濾設備 All-In-One Cartridge Filter System	一體式底盤 One-Piece Chassis	KT-100
SCF-125P100			

一體化頂出過濾砂缸

All-In-One Top-Mount Sand Filter System



型號 Model	直徑mm Diameter	連接閥門管徑 Filter Control Valve	泵 Pump	馬力 H.P.	流速率 (m³/hr) Rate Flow	揚程 M Head	數量 Qty.Ctn.	容量(m³) Volume
SFB020P110	500	1.5"MPV(HT-815)	KT-100	1.5	9.5	13	1	0.34
SFB021P110	600	1.5"MPV(HT-815)	KT-100	1.5	13.5	8	1	0.49

一體化頂出(缸箍)過濾砂缸

All-In-One Top-Mount Clamp Sand Filters



型號 Model	直徑mm Diameter	壓力 Bar	配套的缸頭 Matched Six Way Multiport Valve	配套的泵 Matched pump
SFC020P100	500	2.5	1.5" (HT-815)	KT-100
SFC021P100	600	2.5	1.5" (HT-815)	KT-100
SFC022P100	750	2.5	2" (HT-820)	KT-100
SFC022P150	750	2.5	2" (HT-820)	KT-150
SFC023P150	900	2.5	2" (HT-820)	KT-150
SFC023P200	900	2.5	2" (HT-820)	KT-200

以上圖表為沙缸(石英沙過濾器)的基本尺寸，實際尺寸會因缸身、缸腳及法蘭材質而有所不同。購買前請務必向本公司確認最終尺寸。

These are the basic dimensions of the sand filter. Actual dimensions may vary depending on the tank body, base, and flange material. Please confirm the final specifications with our company before purchase.

地埋機 Buried Filtration System



型號 Model	產品尺寸(mm) Size	過濾器(mm) Filter	水泵功率(hp) Pump	Flow (Q3/H)	Filtration(m³)	Inlet/Outlet(mm)	Control
DMS-500	950*750*830	500	1.5	12	0.79	D=48	Hand Movement
DMS-650	1380*1180*1100	650	1.5	17	0.3	D=48	
DMS-900	1580*1480*1200	900	3	30	0.64	D=60	